

# TRUCK & BUS

RADIAL TYRES



**SUPERIOR  
PERFORMANCE  
& TOTAL TRUST**



# STV06

Long Haul / Regional Application, Steer Axle

| SIZE             | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|------------------|----------|-----------------------|--------------------|------------------|------------------|
| 11R22.5 16PR     | 146/143L | 1055                  | 278                | 17.0             | 8.25             |
| 295/80R22.5 16PR | 150/147L | 1054                  | 297                | 17.0             | 9.00             |
| 315/80R22.5 18PR | 154/151L | 1081                  | 309                | 15.5             | 9.00             |

## HIGHLIGHTS

- Wider tread with flat profile and deep grooves provides high mileage and steering stability
- 4 breaker construction gives smooth handling and protects casing for retreading
- Special tread groove enhance resistance to stone retention to minimize casing damage



● RECOMMENDED ● OPTIONAL



# STV13

Long Haul / Regional Application, Steer or All Axle

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1100R20 18PR | 152/149L | 1085                  | 292                | 16.0             | 8.00V            |

## HIGHLIGHTS

- Wider tread with flat profile ensures stable handling and high speed capability
- Refined siping and slots enhances wet grip and riding comfort



● RECOMMENDED ● OPTIONAL





# STV05A

Long Haul / Regional Application, Steer or All Axle

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1000R20 18PR | 149/146L | 1050                  | 271                | 13.5             | 7.50V            |
| 1100R20 18PR | 152/149L | 1083                  | 286                | 15.0             | 8.00V            |

## HIGHLIGHTS

- Wider tread and flat profile for longer mileage and stable handling
- Special tread grooves resist to stone retention in the groove and minimize casing damage



RECOMMENDED OPTIONAL



# STV73

On / Off Application, Steer or All Axle

| SIZE             | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|------------------|----------|-----------------------|--------------------|------------------|------------------|
| 1100R20 18PR     | 152/149K | 1088                  | 286                | 16.5             | 8.00V            |
| 1200R20 20PR     | 156/153K | 1127                  | 306                | 17.5             | 8.50V            |
| 315/80R22.5 20PR | 156/153L | 1086                  | 309                | 17.5             | 9.00             |

## HIGHLIGHTS

- Excellent durability in tough road conditions
- Excellent all position performance



RECOMMENDED OPTIONAL




# STV22

Regional Application, Drive Axle

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1000R20 18PR | 149/146K | 1054                  | 271                | 16.0             | 7.50V            |
| 1100R20 18PR | 152/149K | 1092                  | 286                | 18.5             | 8.00V            |
| 1200R20 20PR | 156/153K | 1130                  | 306                | 19.5             | 8.50V            |
| 12R22.5 18PR | 152/149K | 1094                  | 305                | 17.5             | 9.00             |

## HIGHLIGHTS

- Solid lug bars demonstrate excellent grip
- Larger void volume dissipates the heat to achieve cooler running

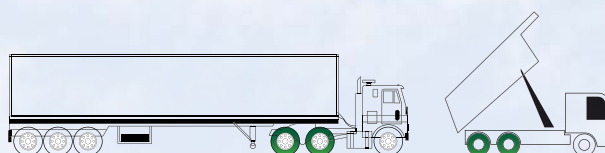

RECOMMENDED



OPTIONAL




# STV11

On/Off Application, Steer or All Axle

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1000R20 18PR | 149/146K | 1054                  | 271                | 15.5             | 7.50V            |
| 1100R20 18PR | 152/149K | 1085                  | 286                | 16.0             | 8.00V            |

## HIGHLIGHTS

- Wide deep tread helps provide longer tread life
- Strong 4 ribs ensure long life with even wear

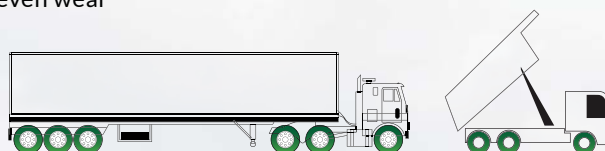

RECOMMENDED



OPTIONAL




# STV18

On / Off Application, Steer or All Axle

| SIZE        | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|-------------|----------|-----------------------|--------------------|------------------|------------------|
| 900R20 16PR | 144/142K | 1022                  | 255                | 16.0             | 7.00             |

## HIGHLIGHTS

- Excellent durability in tough road conditions
- Excellent all position performance

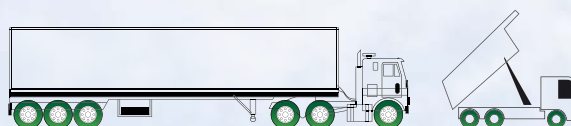

RECOMMENDED OPTIONAL




# SML68

Design for Mining and Logging

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1200R24 20PR | 160/157F | 1240                  | 317                | 24.0             | 8.50V            |

## HIGHLIGHTS

- Highly recommended for mining and logging application
- Improve tread design ensure better grips
- Excellent resistance againsts puncture



RECOMMENDED OPTIONAL




# ML4

Design for Mining and Logging

| SIZE        | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|-------------|----------|-----------------------|--------------------|------------------|------------------|
| 1200R24 *** | 160/157F | 1249                  | 308                | 32.0             | 8.50V            |

## HIGHLIGHTS

- Massive lugs grip the road on rocky and rugged terrain in mining and logging
- Heavy duty casing construction enhances durability and longer life



RECOMMENDED



OPTIONAL




# STV68HD / STV68A\*

Design for Mining and Logging

| SIZE           | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|----------------|----------|-----------------------|--------------------|------------------|------------------|
| * 1000R20 18PR | 149/146F | 1071                  | 271                | 24.5             | 7.50V            |
| 1100R20 18PR   | 152/149F | 1105                  | 292                | 24.5             | 8.00V            |
| 1200R20 20PR   | 156/153F | 1140                  | 306                | 24.5             | 8.50V            |

## HIGHLIGHTS

- Excellent durability in tough road conditions
- Good lug pattern designed to enhance cut resistance due to bad road conditions



RECOMMENDED



OPTIONAL






# SML68XL

Design for Mining and Logging

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1000R20 18PR | 149/146F | 1065                  | 278                | 23.5             | 7.50V            |
| 1100R20 18PR | 152/149F | 1096                  | 293                | 23.5             | 8.00V            |

## HIGHLIGHTS

- Performs best in extreme road conditions
- Extra load and heavy duty casing construction



RECOMMENDED



OPTIONAL




# SML68A

Design for Mining and Logging

| SIZE         | LI/SI    | OVERALL DIAMETER (mm) | SECTION WIDTH (mm) | TREAD DEPTH (mm) | RIM WIDTH (inch) |
|--------------|----------|-----------------------|--------------------|------------------|------------------|
| 1000R20 18PR | 149/146F | 1054                  | 278                | 20.5             | 7.50V            |
| 1100R20 18PR | 152/149F | 1085                  | 293                | 21               | 8.00V            |
| 1200R20 20PR | 154/151F | 1125                  | 315                | 22               | 8.50V            |

## HIGHLIGHTS

- Excellent resistance to cuts
- Excellent durability in tough road conditions




RECOMMENDED



OPTIONAL

# DISTRIBUTION NETWORK

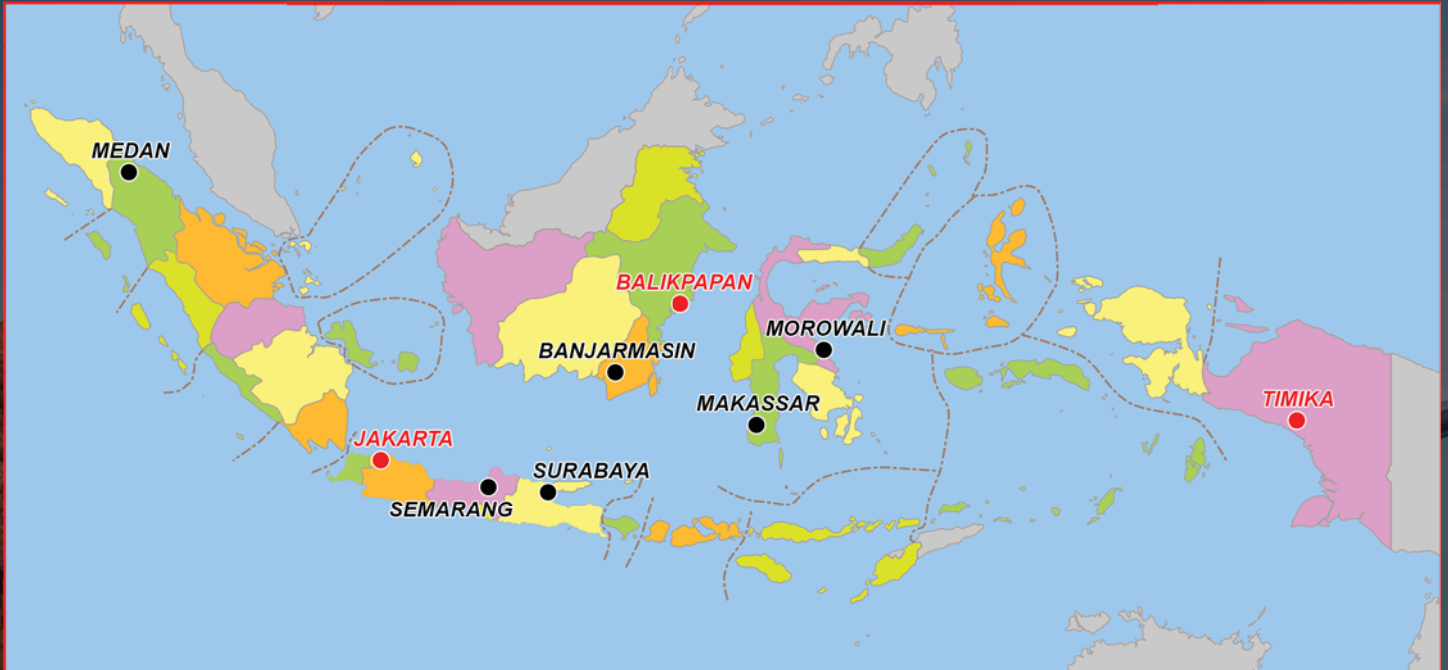

## PT. STAMFORD TYRES DISTRIBUTOR INDONESIA

### JAKARTA Office

Jl. Boulevard Raya blok PA19 No. 4 - 5  
Kelapa Gading Permai,  
Jakarta, DKI Jakarta,  
Indonesia - 14240

**T** : (62-21) 450 4388

**F** : (62-21) 4587 7123

**E** : [info@stamfordtyres.co.id](mailto:info@stamfordtyres.co.id)

**W** : [www.stamfordtyres.co.id](http://www.stamfordtyres.co.id)

### BALIKPAPAN Office

Jl. AMD Projakal RT 02 Kel. Graha Indah  
Kec. Balikpapan Utara,  
Balikpapan, Kalimantan Timur,  
Indonesia

**T** : (62-542) 758 8409

**F** : (62-542) 758 8408

**E** : [info@stamfordtyres.co.id](mailto:info@stamfordtyres.co.id)

**W** : [www.stamfordtyres.co.id](http://www.stamfordtyres.co.id)



# FIRENZA

The Premium Brand From Singapore

SUMO FIRENZA tyres not offered or available for sale in the USA.