




OFF THE ROAD TIRE CATALOGUE 2014

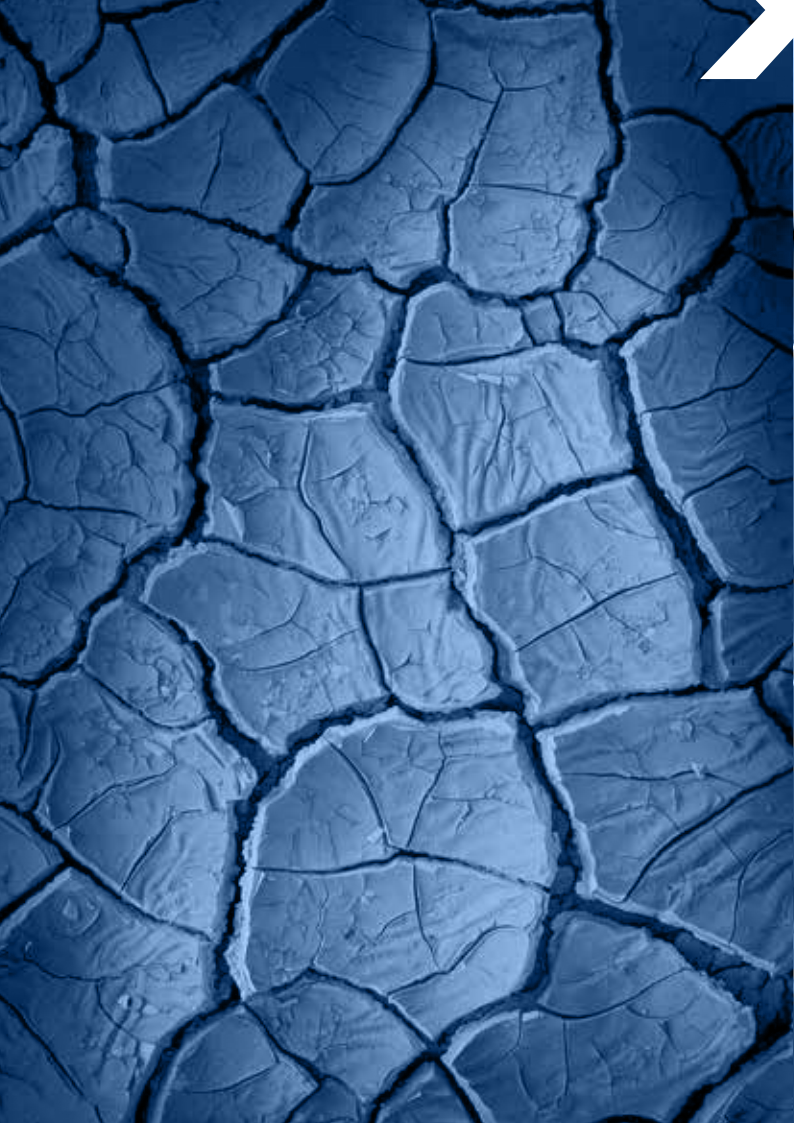

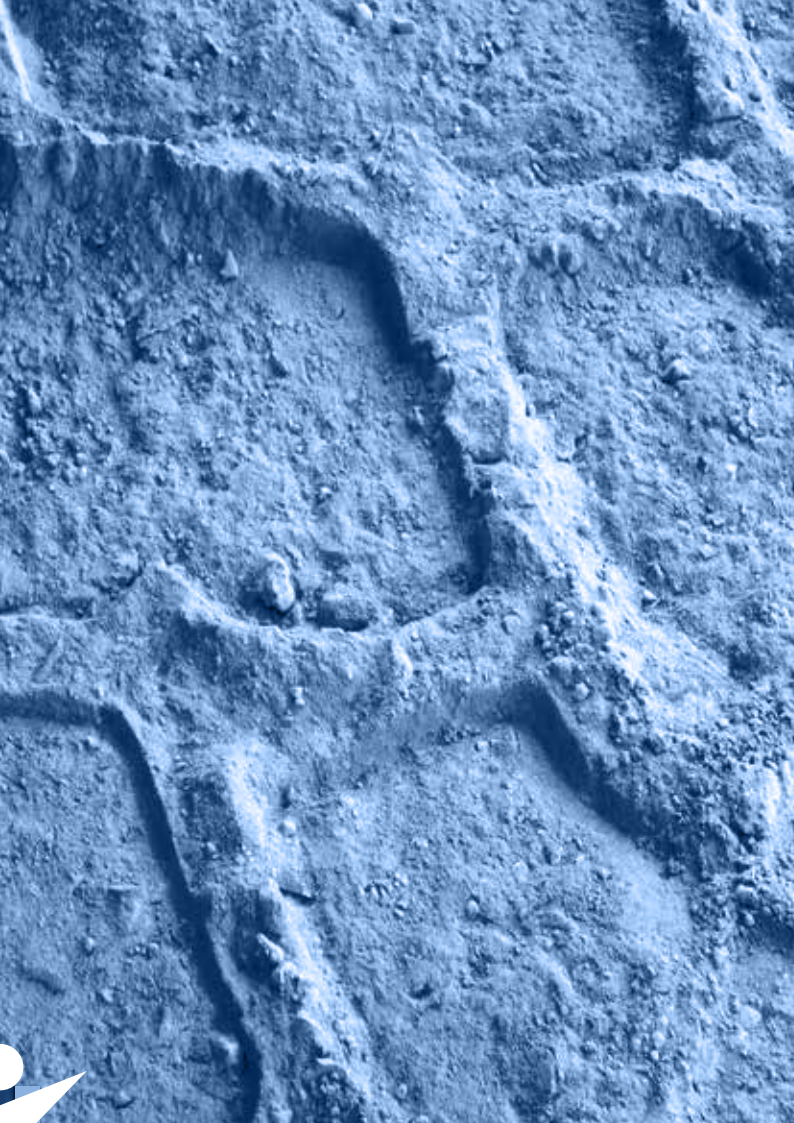

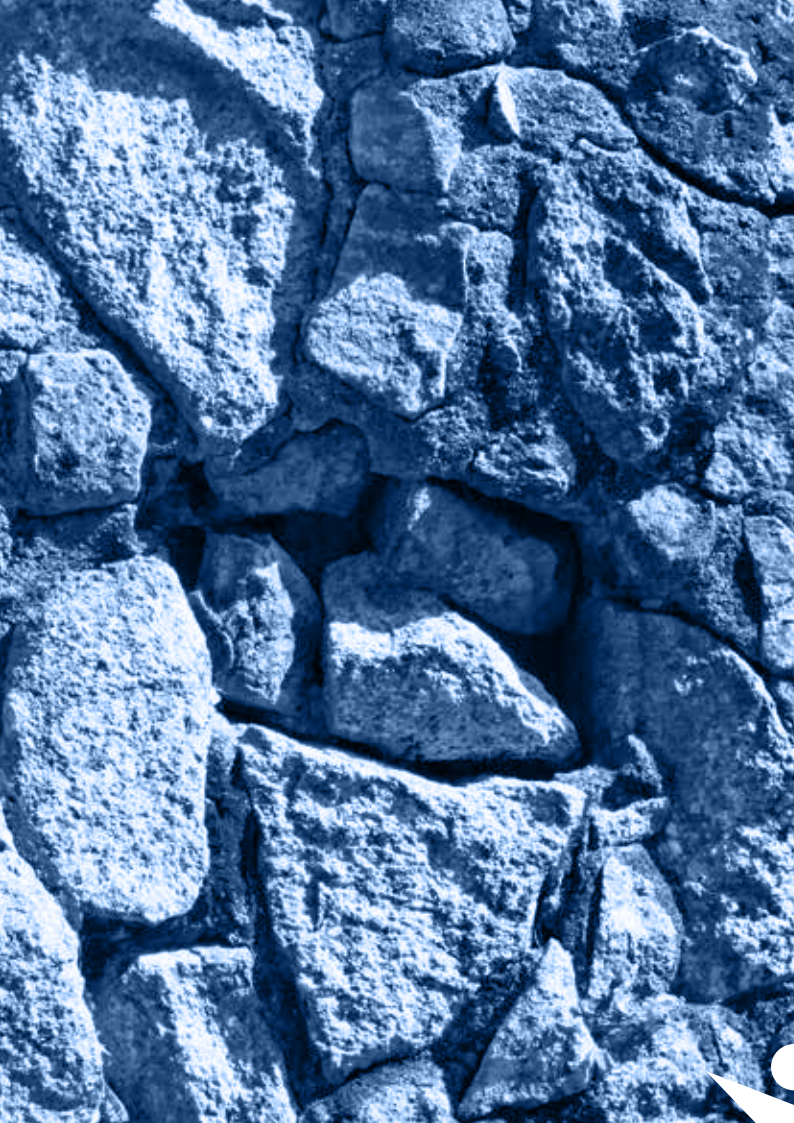

ABOUT MAXAM **p. 2**

OTR RADIAL TIRE RANGE

- ✘ **MSV01** - Highway Service **p. 4**
- ✘ **MS201** - E2/G2/L2 **p. 5**
- ✘ **MS202 Snowxtra** - E2/G2/L2 **p. 6**
- ✘ **MS300** - E3/L3 **p. 7**
- ✘ **MS301** - E3/L3 **p. 8**
- ✘ **MS302** - E3/L3 **p. 9**
- ✘ **MS404** - E4/L4 **p. 10**
- ✘ **MS405** - E4/L4 **p. 11**
- ✘ **MS303** - E3 **p. 12**
- ✘ **MS401** - E4 **p. 13**
- ✘ **MS402** - E4 **p. 14**
- ✘ **MS403** - E4 **p. 15**
- ✘ **MS501 Minextra** - L5 **p. 16**
- ✘ **MS502 Minextra** - L5S **p. 17**

TECHNICAL INFORMATION **p. 18**

OTR TIRE LIMITED WARRANTY **p. 20**





ABOUT MAXAM



A GLOBAL COMPANY

The Maxam team has over 50 years' experience in the OTR industry. Maxam manufacture premium quality all steel radial tires at its state of the art facility in Asia.

MAXAM[®] all steel radial OTR tires are



distributed throughout the world by some of the aftermarkets best known and professional service providers.

Its tires contribute to improved living standards throughout the world.

MANUFACTURING EQUIPMENT

Produced to the highest standards at Maxam's state of the art manufacturing facility, located in Shandong Province, China, the Maxam plant is a technically advanced radial tire manufacturing plant with a highly skilled management team

and workforce utilizing the very latest manufacturing techniques, materials and production equipment to produce radial OTR tires of the highest quality, capable of performing in the toughest of conditions and most demanding applications.

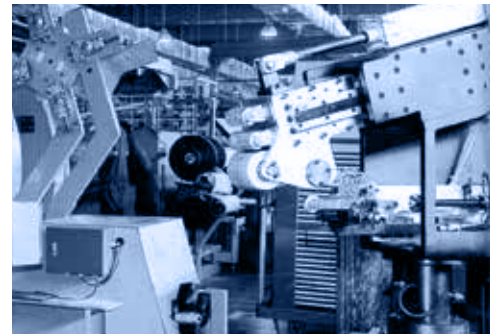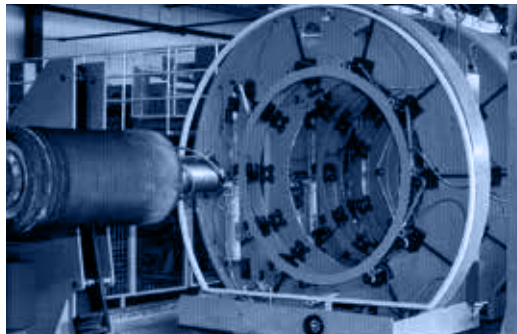

QUALITY

Maxam firmly believes that "Quality drives productivity", not only at manufacturing level where the very latest QC systems ensure the finest quality of product is produced but also in logistics, administration, planning and distribution. Maxam's belief is that customer satisfaction is the ultimate

goal and drives quality, innovation, productivity and ultimately profitability. Maxam all steel radial OTR tires are not only manufactured to ISO 9001 but also designed to the same stringent standards.



MSV01

Highway Service



The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.

- ✦ Reduced wheel spin & improved traction
- ✦ Excellent resistance to cuts and damage
- ✦ Suitable for On & Off Road use
- ✦ Improved operator comfort
- ✦ Self-cleaning tread
- ✦ Low road noise and reduced vibration



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
14.00R24 (385/95R24)	170F	/	TT	10.00 W	in.	29/32	15.7	54.2
					mm	23	399	1376
14.00R25 (385/95R25)	170F	/	TL	9.50/1.7 CR 10.00/1.5	in.	29/32	15.7	54.2
					mm	23	399	1376
16.00R25 (445/95R25)	174F	/	TL	11.00/1.7 CR 11.25/2.0	in.	34/32	18.3	59.1
					mm	27	465	1500
20.5R25 (525/80R25)	177F	/	TL	17.00/1.7 CR 17.00/2.0	in.	37/32	20.3	59.2
					mm	30	516	1504

MS201

E2/G2/L2

The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.

- ✦ Reduced wheel spin & improved traction
- ✦ Excellent resistance to cuts and damage
- ✦ Off Road directional tread design
- ✦ Improved operator comfort
- ✦ Self-cleaning tread
- ✦ Low road noise and reduced vibration



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH	TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
20.5R25	193A2 / 177B	**	TL	17.00/2.0	in.	35/32	59.3
					mm	28	1507

MUD+SNOWXTRA MS202
E2/G2/L2



The aggressive, self-cleaning tread design provides excellent traction in tough, demanding & winter/snow applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Self-cleaning tread
- ✦ Superior winter traction
- ✦ Suitable for loaders and articulated dumpers
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
14.00R24	157B / 153A8 / 175A2	*	TL	10.00VA	in.	29/32	15.3	53.5
					mm	23	388	1360
17.5R25	167B / 153A8 / 182A2	**	TL	14.00/1.5	in.	35/32	17.7	52.7
					mm	28	449	1339
20.5R25	177B / 161A8 / 193A2	**	TL	17.00/2.0	in.	37/32	20.3	58.7
					mm	30	516	1491
23.5R25	185B / 170A8 / 201A2	**	TL	19.50/2.5	in.	41/32	23.5	63.5
					mm	33	596	1613
26.5R25	193B / 209A2	**	TL	22.00/3.0	in.	45/32	26.7	68.8
					mm	36	679	1748

MS300

E3/L3

The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Self-cleaning tread
- ✦ Superior traction
- ✦ Suitable for loaders and articulated dumpers
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
20.5R25	193A2 / 177B	**	TL	17.00/2.0	in.	36/32	20.6	58.4
					mm	28.5	522	1484
23.5R25	201A2 / 185B	**	TL	19.50/2.5	in.	40/32	23.7	63.2
					mm	31.5	601	1605

MS301

E3/L3



The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Self-cleaning tread
- ✦ Superior traction
- ✦ Suitable for loaders and articulated dumpers
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
17.5R25	182A2 / 167B	**	TL	14.00/1.5	in.	35/32	17.7	52.7
					mm	28	449	1339
20.5R25	193A2 / 177B	**	TL	17.00/2.0	in.	37/32	20.4	59.0
					mm	30	517	1499
23.5R25	201A2 / 185B	**	TL	19.50 /2.5	in.	41/32	23.9	63.4
					mm	33	608	1611
26.5R25	209A2 / 193B	**	TL	22.00/3.0	in.	45/32	26.7	68.8
					mm	36	679	1748
29.5R25	216A2 / 200B	**	TL	25.00/3.5	in.	49/32	30.0	74.3
					mm	39	763	1886



MS302

E3/L3

The aggressive, self-cleaning tread design provides excellent traction and floatation in articulated dump truck and loader applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Self-cleaning tread
- ✦ Low rolling resistance
- ✦ Long life
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
23.5R25	201A2 / 185B	**	TL	19.50/2.5	in.	48/32	23.6	63.5
					mm	38	599	1613
26.5R25	209A2 / 193B	**	TL	22.00/3.0	in.	52/32	26.5	68.6
					mm	41	672	1742
29.5R25	216A2 / 200B	**	TL	25.00/3.5	in.	54/32	30.0	74.5
					mm	43	763	1893

MS404

E4/L4



The aggressive, self-cleaning deep E4 tread design provides excellent traction in tough, demanding applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Long life self-cleaning deep tread
- ✦ Superior traction
- ✦ Suitable for loaders and articulated dumpers
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
23.5R25	210A2 / 185B	**	TL	19.50/2.5	in.	60/32	23.7	65.2
					mm	48	603	1655



MS405

E4/L4

The new aggressive, self-cleaning E4/L4 tread design provides high traction and durability in tough, demanding applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Long life non-directional deep tread design
- ✦ Superior durability and reduced cost per hour
- ✦ Suitable for loaders and articulated dumpers
- ✦ Excellent traction & floatation
- ✦ Reduced vibration and improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
23.5R25	210A2 / 185B	**	TL	19.50/2.5	in.	66/32	23.7	65.2
					mm	52	603	1655
26.5R25	209A2 / 193B	**	TL	22.00/3.0	in.	70/32	26.7	69.9
					mm	56	679	1775
29.5R25	216A2 / 200B	**	TL	25.00/3.5	in.	75/32	30.0	75.1
					mm	60	763	1908

MS303

E3



The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.

- ✦ Reduced wheel spin & improved traction
- ✦ Excellent resistance to damage
- ✦ Longer tire life
- ✦ Off Road tread design
- ✦ Improved operator comfort
- ✦ Self-cleaning tread
- ✦ Low road noise and reduced vibration



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
33.25R29	209B	**	TL	27.00/3.5	in.	55/32	33.8	82.6
					mm	44	859	2097



MS401

E4

The aggressive, self-cleaning deep E4 tread design provides excellent traction in tough, rigid dump truck applications.

- ✦ Reduced wheel spin & excellent traction
- ✦ Excellent resistance to damage
- ✦ Longer tire life
- ✦ Off Road tread design
- ✦ Improved operator comfort
- ✦ Self-cleaning tread
- ✦ Low road noise and reduced vibration



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
12.00R24	160/157F	***	TT / TL	8.50V	in.	40/32	12.0	49.3
					mm	32	305	1251
14.00R24	169B	***	TT	10.00W	in.	46/32	15.6	55.1
					mm	36	395	1400
14.00R25	169B	***	TT / TL	10.00/1.5	in.	46/32	15.6	55.1
					mm	36	395	1400
18.00R33	191B	**	TL	13.00/2.5	in.	66/32	20.3	73.6
					mm	52	516	1876
21.00R33	200B	**	TL	15.00/3.0	in.	77/32	21.8	78.0
					mm	61	554	1982
21.00R35	201B	**	TL	15.00/3.0	in.	74/32	23.2	80.7
					mm	59	590	2050
24.00R35	209B	**	TL	17.00/3.5	in.	83/32	26.2	85.4
					mm	66	666	2170
27.00R49	223B	**	TL	19.50/4.0	in.	88/32	28.9	106.7
					mm	70	735	2710

MS402

E4



The self-cleaning deep E4 tread design provides excellent wear resistance in tough, rigid dump truck applications.

- ✦ Reduced wheel spin & improved traction
- ✦ Excellent resistance to damage and cuts
- ✦ Longer tire life
- ✦ Off Road tread design
- ✦ Improved operator comfort
- ✦ Self-cleaning tread
- ✦ Low road noise and reduced vibration



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
18.00R33	191B	**	TL	13.00/2.5	in.	66/32	20.1	73.8
					mm	52	511	1874
24.00R35 *	209B	**	TL	17.00/3.5	in.	71/32	27.8	86.5
					mm	57	705	2196
27.00R49	223B	**	TL	19.50/4.0	in.	82/32	29.0	106.4
					mm	65	737	2702

MS403

E4

The self-cleaning, wide, flat profile offers superb traction, wear resistance, stability and cool running for optimum performance in the toughest of rigid dump truck applications.

- ✦ Choice of, Standard, Heat or Cut resistant compounds
- ✦ Excellent ride due to wide, flat footprint
- ✦ Innovative, non-directional tread design for optimum traction
- ✦ E4+ deep tread for longer tire life time
- ✦ Reduced vibration and improved stability



SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
33.00R51	235B	**	TL	24.00/5.0	in.	105/32	35.2	120.5
					mm	83	894	3061
36.00R51	241B	**	TL	26.00/5.0	in.	122/32	38.9	127.3
					mm	97	988	3233
40.00R57	250B	**	TL	29.00/6.0	in.	117/32	43.2	141.5
					mm	93	1097	3594

MINE^XTRA MS501
L5



The extra deep L5 tread design provides excellent traction in tough and demanding applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Good balance between tread protection and sufficient traction
- ✦ Extra deep L5 traction pattern
- ✦ Long life
- ✦ Excellent traction & flotation
- ✦ Reduced vibration & improved stability




SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
17.5R25	182A2	**	TL	14.00/1.5	in.	83/32	17.5	54.9
					mm	66	445	1395
20.5R25	193A2	**	TL	17.00/2.0	in.	90/32	20.9	60.9
					mm	72	531	1548
23.5R25	201A2	**	TL	19.50/2.5	in.	98/32	23.8	65.6
					mm	78	605	1665
26.5R25	209A2	**	TL	22.00/3.0	in.	110/32	26.9	70.6
					mm	87	684	1794
29.5R25	216A2	**	TL	25.00/3.5	in.	118/32	30,6	75.6
					mm	94	777	1920
29.5R29	218A2	**	TL	25.00/3.5	in.	125/32	31.5	79.1
					mm	99	800	2010
35/65R33	223A2	**	TL	28.00/3.5	in.	120/32	36.0	82.1
					mm	95	914	2085

MS502 *MINEXTRA* L5S

The extra deep smooth L5S tread design provides maximum wear resistance in the toughest applications.

- ✦ Wear & Cut resistant tread compound
- ✦ Especially suitable for mining and waste handling operations
- ✦ Optimum reliability
- ✦ Long life
- ✦ Excellent traction & floatation
- ✦ Reduced vibration & improved stability




SIZE	LOAD INDEX & SPEED SYMBOL	STAR RATING	TYPE	RECOM RIM INCH		TREAD DEPTH	SECTION WIDTH (SW)	OVERALL DIAMETER (OD)
18.00R25	204A2	**	TL	13.00/2.5	in.	110/32	20.1	65.7
					mm	87	511	1670
17.5R25	182A2	**	TL	14.00/1.5	in.	86/32	17.5	54.9
					mm	68	445	1395
20.5R25	193A2	**	TL	17.00/2.0	in.	93/32	20.9	60.9
					mm	74	531	1548
23.5R25	201A2	**	TL	19.50/2.5	in.	101/32	23.8	65.6
					mm	80	605	1665
26.5R25	209A2	**	TL	22.00/3.0	in.	113/32	26.9	70.6
					mm	90	684	1794
29.5R25	216A2	**	TL	25.00/3.5	in.	122/32	30.6	75.6
					mm	97	777	1920
29.5R29	218A2	**	TL	25.00/3.5	in.	129/32	31.5	79.1
					mm	102	800	2010


TECHNICAL INFORMATION




All Steel Radial Tire Construction

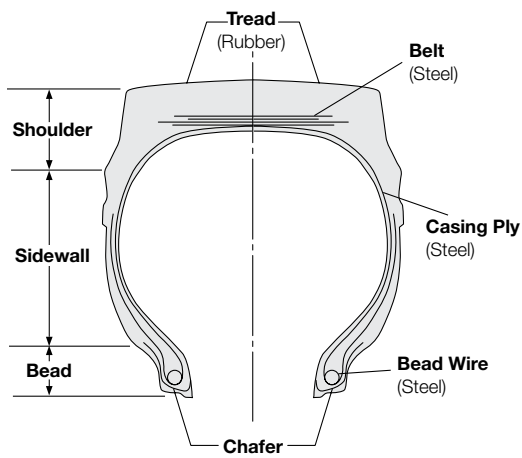


Tire Dimensions

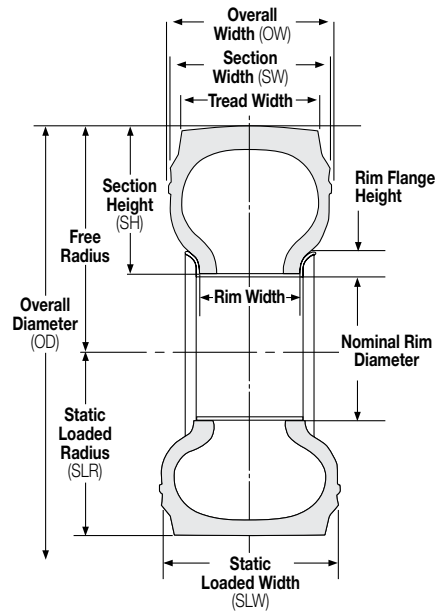

Tread Depth TRA Classification

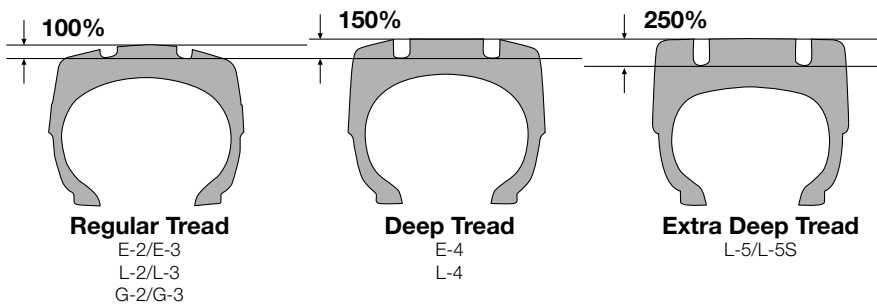

Tire Markings

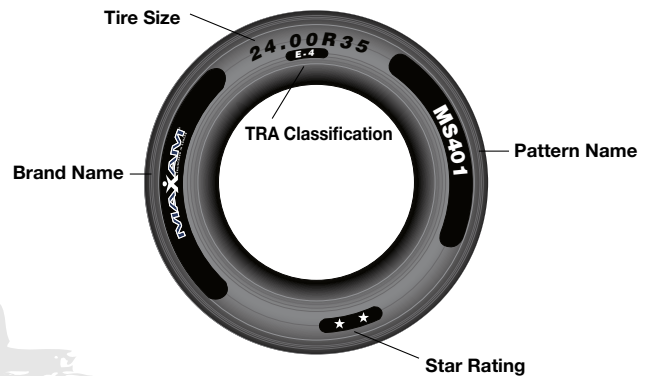

Tire Load Limits at Various Cold Inflation Pressures (100 kPa=1bar) and Speeds

SIZE	PATTERN	MARKING	SPEED	HIGHWAY SERVICE								
				kPa	200	300	400	500	600	700	800	900
				psi	29	44	58	73	87	102	116	131
385/95R24 (14.00R24)	MSV01	170F	80 km/h	kg				3800	4350	4900	5450	6000
			50 m.p.h.	lbs				8379	9591	10805	12017	13230
385/95R25 (14.00R25)	MSV01	170F	80 km/h	kg				3800	4350	4900	5450	6000
			50 m.p.h.	lbs				8379	9591	10805	12017	13230
445/95R25 (16.00R25)	MSV01	174F	80 km/h	kg				4270	4875	5480	6090	6700
			50 m.p.h.	lbs				9415	10749	12083	13428	14774
525/80R25 (20.5R25)	MSV01	177F	80 km/h	kg	2650	3600	4500	5430	6380	7300		
			50 m.p.h.	lbs	5843	7938	9922	11973	14068	16097		

SIZE	PATTERN	MARKING	SPEED	OFF-THE-ROAD TRACTOR AND GRADER SERVICE										
				kPa	175	200	225	250	275	300	325	350	375	
				psi	25	29	33	36	40	44	47	51	54	
14.00R24	MS202 SNOWXTRA	*	40 km/h	kg		2240	2430	2650	2800	3000	3250	3350	3650	
			25 m.p.h.	lbs		4940	5360	5840	6150	6600	7150	7400	8050	
17.5R25	MS201 - MS202 SNOWXTRA - MS301	**	40 km/h	kg	2360	2575	2900	3075	3350	3650				
			25 m.p.h.	lbs	5200	5680	6400	6800	7400	8050				
20.5R25	MS202 SNOWXTRA - MS301	**	40 km/h	kg	3150	3450	3825	4125	4375	4625				
			25 m.p.h.	lbs	6950	7600	8550	9100	9650	10200				
23.5R25	MS202 SNOWXTRA - MS301	**	40 km/h	kg	4000	4500	4875	5300	5600	6000				
			25 m.p.h.	lbs	8800	9900	10700	11700	12300	13200				

SIZE	PATTERN	MARKING	SPEED	OFF-THE-ROAD SLOW SPEED SERVICE													
				kPa	525	550	575	600	625	650	675	700	725	750	775	800	825
				psi	76	80	83	87	91	94	98	102	105	109	112	116	120
18.00R25	MS502 MINEXTRA	**	10 km/h	kg	11200	11800	12150	12500	12850	13200	13600	14000	14500	14750	15000	15500	16000
			5 m.p.h.	lbs	24700	26000	26800	27600	28300	29100	30000	30900	32000	32500	33100	34200	35300

SIZE	PATTERN	MARKING	SPEED	OFF-THE-ROAD SLOW SPEED SERVICE																				
				kPa	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	
				psi	29	33	36	40	44	47	51	54	58	62	65	69	73	76	80	83	87	91	94	
17.5R25	MS202 SNOWXTRA - MS301 MS501/MS502 MINEXTRA	**	10 km/h	kg	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000	8250	8500	
			5 m.p.h.	lbs	8050	8800	9350	10200	10700	11700	12300	12800	13200	13600	14300	14800	15700	16100	16500	17100	17600	18200	18700	
20.5R25	MS201 - MS202 SNOWXTRA MS301 - MS501/MS502 MINEXTRA	**	10 km/h	kg	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900	11200	11500	
			5 m.p.h.	lbs	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000	24700	25400	
23.5R25	MS202 SNOWXTRA - MS301 - MS302 MS404 - MS405 - MS501/MS502 MINEXTRA	**	10 km/h	kg	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600	14000	14500	
			5 m.p.h.	lbs	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000	30900	32000	
26.5R25	MS202 SNOWXTRA - MS301 - MS302 MS405 - MS501/MS502 MINEXTRA	**	10 km/h	kg	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000	18000	18500	
			5 m.p.h.	lbs	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36480	37500	39700	40800	
29.5R25	MS301 - MS302 - MS405 MS501/MS502 MINEXTRA	**	10 km/h	kg										15500	16000	17000	17500	18000	19000	19500	20000	20600	21200	22400
			5 m.p.h.	lbs											34200	35300	37500	38600	39700	41900	43000	44100	45400	46700
29.5R29	MS501/MS502 MINEXTRA	**	10 km/h	kg										16500	17000	18000	18500	19500	20000	20600	21200	22400	23000	23600
			5 m.p.h.	lbs											36400	37500	39700	40800	43000	44100	45400	46700	49400	50700
35/65R33	MS501/MS502 MINEXTRA	**	10 km/h	kg										19500	20600	21200	22400	23000	23600	25000	25750	26500	27250	28000
			5 m.p.h.	lbs											43000	45400	46700	49400	50700	52000	55100	56800	58400	60000

SIZE	PATTERN	MARKING	SPEED	OFF-THE-ROAD HAULAGE SERVICE																							
				kPa	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	700	725	750	775	800	
				psi	40	44	47	51	54	58	62	65	69	73	76	80	83	87	91	94	96	102	105	109	112	116	
17.5R25	MS202 SNOWXTRA MS301	**	50 km/h	kg	3350	3550	3750	4000	4125	4375	4625	4875	5150	5450	5600												
			30 m.p.h.	lbs	7400	7850	8250	8800	9100	9650	10200	10700	11400	12000	12300												
20.5R25	MS201 - MS202 SNOWXTRA MS301	**	50 km/h	kg	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300												
			30 m.p.h.	lbs	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100												
23.5R25	MS202 SNOWXTRA - MS301 - MS302 MS404 - MS405	**	50 km/h	kg	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250												
			30 m.p.h.	lbs	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400												
26.5R25	MS202 SNOWXTRA MS301 - MS302 - MS405	**	50 km/h	kg	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500												
			30 m.p.h.	lbs	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400												
29.5R25	MS301 - MS302 - MS405	**	50 km/h	kg	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000												
			30 m.p.h.	lbs	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900												
33.25R29	MS303	**	50 km/h	kg	11200	12150	12850	13600	14000	15000	15500	16500	17000	17500	18500												
			30 m.p.h.	lbs	24700	26800	28300	30000	30900	33100	34200	36480	37500	38600	40800												
12.00R24	MS401	***	50 km/h	kg									2900	3000	3150	3250	3350	3550	3650	3750	3875	4000	4000	4125	4250	4375	4500
			30 m.p.h.	lbs										6400	6600	6950	7150	7400	7850	8050	8250	8550	8800	8800	9100	9350	9650
14.00R24	MS401	***	50 km/h	kg									4000	4125	4375	4500	4625	4750	5000	5150	5300	5450	5600	5700	5800		
			30 m.p.h.	lbs										8800	9100	9650	9900	10200	10500	11000	11400	11700	12000	12300	12550	12800	
14.00R25	MS401	***	50 km/h	kg									4000	4125	4375	4500	4625	4750	5000	5150	5300	5450	5600	5700	5800		
			30 m.p.h.	lbs										8800	9100	9650	9900	10200	10500	11000	11400	11700	12000	12300	12550	12800	
18.00R33	MS401 - MS402	**	50 km/h	kg									7750	8000	8500	8750	9000	9250	9750	10000	10300	10600	10900				
			30 m.p.h.	lbs										17100	17600	18700	19300	19800	20400	21500	22000	22700	23400				



OFF THE ROAD TIRE LIMITED WARRANTY

LIMITED WARRANTY

The following warranty contains certain rights and obligations that pertain to Maxam branded All Steel Radial off-the-road (OTR) tires. Please review these rights and obligations carefully.

DEFINITION

This Limited Warranty covers all Maxam branded All Steel Radial OTR tires as designated in Maxam OTR product listings (price books and leaflets). It does not include, DA or tires marked "NA" (not adjustable).

ELIGIBILITY


Every OTR tire bearing the name Maxam and with a complete serial number moulded in the sidewall is warranted to be free from manufacturing defects within the manufacturer's control. If an examination by an authorized Maxam OTR representative shows that any such tire failed as a result of manufacturing defects, it will, at the option of Maxam, either be repaired at no charge, or a credit will be issued toward the purchase price of a replacement tire, being a comparable Maxam OTR product. This credit will be determined by applying the lesser of the percentage of remaining tread depth


(RTD%) and the maximum age based credit shown in the following chart. The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of credit to be applied. Such credit must be applied toward the purchase price of the replacement tire in effect at the time of adjustment. All adjusted tires will be disabled and the serial numbers will be removed. Customer is responsible for the disposal of all adjusted tires. This warranty coverage is for OTR tires used within published designed specifications for Maxam tires. Any use outside such specifications automatically voids this warranty. Please consult Maxam technical leaflets, etc. for design specifications. This warranty does not apply to used, DA or "NA" (not adjustable) tires.

TIME PERIOD

This warranty applies to Maxam All Steel Radial OTR tires for a maximum period of five years (60 months) from date of manufacture. The date of manufacture can be determined by the first six digits in the serial number code. For non-serial controlled tires, the date of manufacture can be determined from the production lot code.

AMOUNT OF CREDIT TO CUSTOMER FOR MANUFACTURING DEFECTS

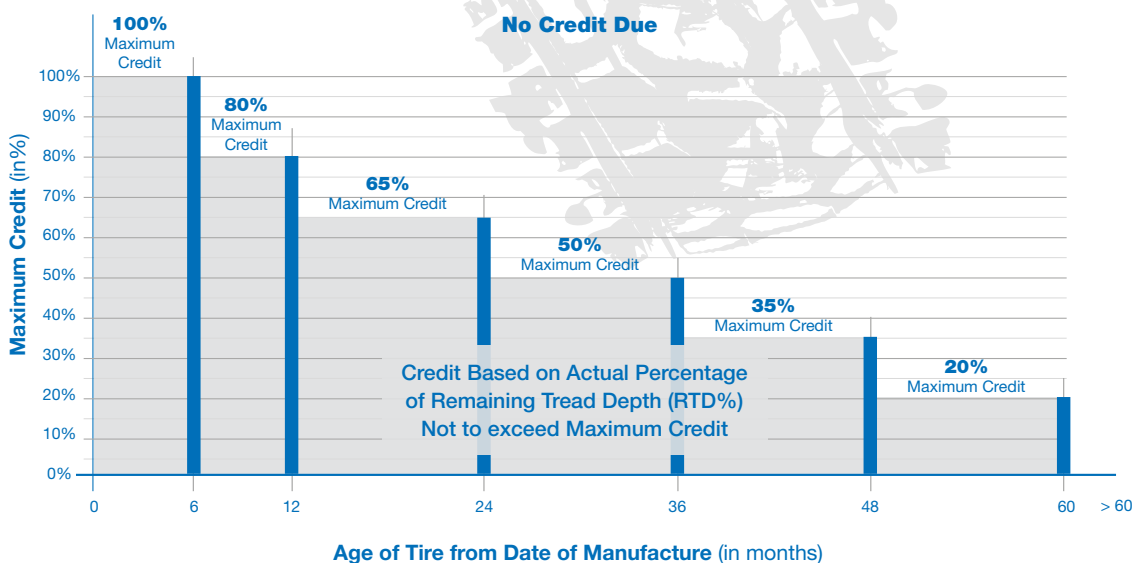

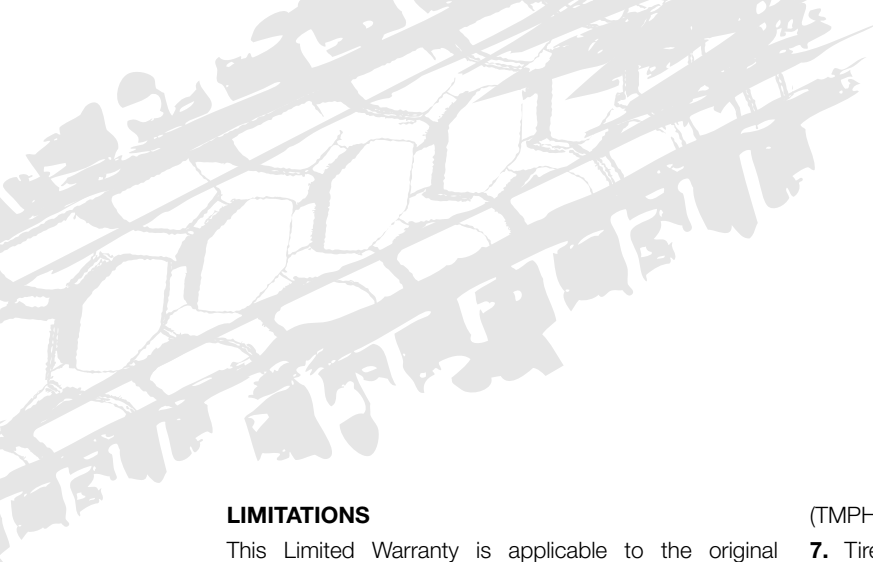

LIMITATIONS

This Limited Warranty is applicable to the original purchaser and is not assignable to subsequent purchasers. No Maxam dealer, agent, or representative has the authority to make or imply any representation, promise or agreement which in any way varies or extends the terms of this warranty. Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer. This Limited Warranty is under no circumstances a representation that a tire failure cannot occur. This limited warranty gives you specific rights and you may also have other rights which may vary from jurisdiction to jurisdiction. To the extent that the provisions of any applicable legislation expressly replace, eliminate, amend or prohibit any term or terms contained herein, such term or terms shall be accordingly replaced, eliminated, amended or extended, as the case may be, in accordance with such legislation.

LIMITED WARRANTY EXCLUSIONS

ALL OTR TIRES AND TUBES

All OTR tire and tube warranties are subject to the following exclusions:

1. Tires purchased more than 60 months from the date of manufacture.
2. Tires for which alternative warranties or guarantees have been negotiated.
3. Tire used under chains. Maxam does recognize that in many applications tire chains provide enhanced tire protection and may extended tire life. In these cases, Maxam may extend special negotiated warranties. Please consult your Maxam OTR representative for details.
4. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, overloading, running flat, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical action, fire or other externally generated heat, use of studs, water or other material entrapped inside the tire, vehicle damage or road hazards (such as rock cuts, punctures, cut separations, impacts, flex breaks).
5. Claims for irregular wear or rapid tread wear are not covered by this limited warranty.
6. Any tire which is operated above its Ton-Mile per Hour

(TMPH) or Tonne-Kilometer per Hour (TKPH) rating.

7. Tires mounted with tubes or o-rings not approved by Maxam.
8. Used, Repaired, or Retread tires.
9. Any modifications to the tire (added buttress shoulders, re-grooving, re-lugging, etc.) void all warranties.
10. Any material added to the tire (tire fill, sealer, balancer, etc.) is not covered by this limited warranty and will not be compensated for in case of credit being issued for the tire.
11. Use of a solid type fill (such as urethane) voids all warranties.
12. Any costs associated with the repair of tires are not covered unless previously approved by Maxam.
13. Costs of mounting and balancing following pro-rated replacement or repair of tires or tubes, and applicable federal, state, provincial, and local taxes, are not covered under this warranty.
14. Cost of disposal of warranted tires. Disposal of tires is the sole responsibility of the customer.
15. **ALL OTHER WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED TO THE EXTENT PERMITTED BY LAW.**
16. Some jurisdictions do not allow limitations in how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.
17. **ALL OBLIGATIONS OR LIABILITIES FOR INDIRECT, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGE ARE HEREBY EXCLUDED TO THE EXTENT PERMITTED BY LAW, INCLUDING ECONOMIC LOSS, LOSS OF PROFIT, LOSS OF USE OF VEHICLE, LOSS OF TIME, PERSONAL INJURY OR DEATH.**

TO OBTAIN WARRANTY SERVICE

1. Contact an authorized Maxam OTR dealer or representative. Please be prepared to provide proof of purchase of the product and purchase date.
2. The authorized dealer or representative will contact Maxam to arrange the inspection of the tire in question and processing of your claim. The dealer has no authority or responsibility to make the determination as to eligibility for coverage under this warranty.



Distributed by:

